


Tilting Grading Bucket Installation Information

2 flow control valves are supplied with your bucket. They should be installed as shown in the pictures. Once they are installed they need to be adjusted for maximum operating pressure of 2500 p.s.i.



Flow
Control
Valves

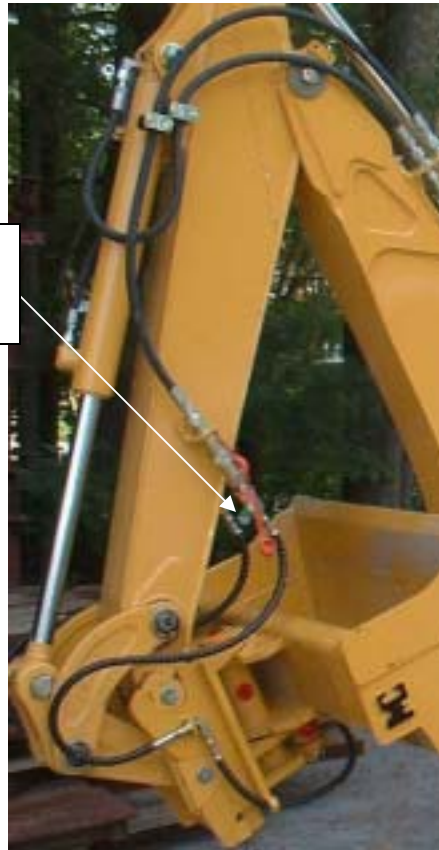

In the event you are installing the Tilting Grading Bucket with a Thumb, please see reverse side.

M. C. Faulkner and Sons, Inc.
5 Shaws Mill Rd.
Gorham, ME 04038
207-839-2048
Fax: 207-839-9104

Recommended installation of a Tilting Grading Bucket with a Thumb:

Install Flow Control Valves, Ball Valves and a Thumb Lock, as shown below.



High Pressure Ball Valve

Flow Control Valve



Sample photos of Thumb Locks